

MEMS MULTI-MODE RACKMOUNT 1xN OPTICAL SWITCH

CONFIGURABLE UP TO 1x64

DiCon's MEMS Multi-Mode Rackmount 1xN Optical Switch allows a common input fiber to be switched to any one of N output fibers. Based on DiCon's industry proven MEMS optical switches, this system offers reliable switching over a very long lifetime.



FEATURES

- Proven MEMS Durability and Reliability
- Available in any 1xN size up to 1x64
- Fast Switching Time
- Simple Rackmount Design

APPLICATIONS

- Fiber Monitoring
- Fiber Sensing
- Test & Measurement



MEMS MULTI-MODE RACKMOUNT 1XN OPTICAL SWITCH

CONFIGURABLE UP TO 1X64


OPTICAL SPECIFICATIONS^{1,2}

PARAMETER		RATING
Insertion Loss ^{3,4}	Up to 1x4	1.0 dB max.
	Up to 1x8	1.4 dB max.
	Up to 1x16	1.6 dB max.
	Up to 1x24	2.0 dB max.
	Up to 1x64	2.4 dB max.
Crosstalk ⁵	50 μm	-25dB max.
	62.5 μm	-20dB max.
Back Reflection		-20 dB max.
Switching Time	Up to 1x4	20 ms max.
	Up to 1x16	30 ms max.
	Up to 1x64	40 ms max.
TDL		0.4 dB max.
Repeatability ⁶		0.04 dB max.
Durability		10 ⁹ cycles min.
Optical Power		500 mW max.
Operating Temp		-5 to 70°C
Storage Temp		-40 to 85°C
Fiber Type		Multi-mode

- Specifications are without connectors.
- Aligned transparent to channel 1.
- IL is measured at specified wavelength, 23°C ± 5°C.
- IL is for single-band. Dual-band adds 0.6 dB.
- Optical off state isolation is the same as crosstalk.
- Repeatability is defined within 100 cycles.

MECHANICAL DIMENSIONS

1U 19" RACKMOUNT CHASSIS

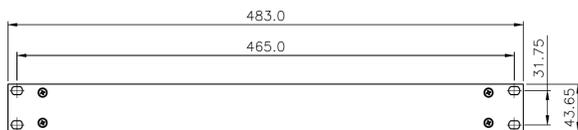

FRONT PANEL CONNECTOR & CHASSIS OPTIONS¹

CHASSIS SIZE	FC	SC	LC
1U	1x42	1x54	1x84
2U	1x72	1x80	1x144

1. Maximum 1xN size based on connector spacing and chassis size.

ORDERING INFORMATION

MSR - □ - □ - □ - □ - □ - □ - B - □

Product Code

MSR MEMS Rackmount Switch

Switch Configuration

1xN 1xN Switch
Specify N≤64 for 50μm or N≤16 for 62.5μm

Housing Type

1U 1U Rackmount
2U 2U Rackmount

Control Interface

ETH Ethernet
RS2 RS232
E/R Ethernet & RS232

Only one control interface can be selected at a time.

Wavelength Range

8 850 nm only
9 980 nm only
8/13 850 & 1290 -1330 nm

Other wavelengths available upon special request

Fiber Type

50 50μm core
62 62.5μm core

Connector Type

FC FC/PC
LC LC/PC
SC SC/PC
ST ST/PC
N NONE

Other connector types available upon request

Port Type

B Bulkhead Adaptors

Port Location

F Front Panel
R Rear Panel

ELECTRICAL SPECIFICATIONS

PARAMETER	RATING	
Latching Type	Non-Latching	
Vcc Voltage	100 - 240 VAC	
Control Type	Ethernet or RS232	
Connector Type	Ethernet	RJ45
	RS-232	9-Pin DB9