

MEMS DYNAMIC POWER EQUALIZER

GP800 Model, Singlemode Fiber





DiCon's **MEMS Dynamic Power Equalizer (DPE)** combines a MEMS VOA with a Tap Detector. This allows the optical power after the VOA to be monitored and the attenuation of the VOA to be adjusted in order to maintain a specified power level.

- Constant Power Mode
- Constant Attenuation Mode
- Proven MEMS Durability and Reliability
- Compact Form Factor
- Excellent Output Accuracy
- Wide Attenuation Range
- Low Insertion Loss

Applications

- Optical Communications
- Fiber Sensing
- DWDM Gain Equalization
- Bio-medical Instrumentation

Operating Principle

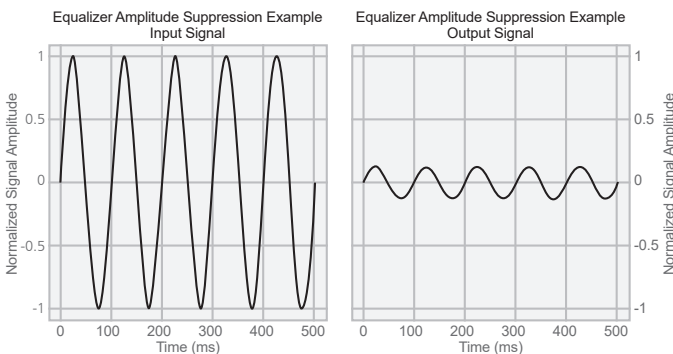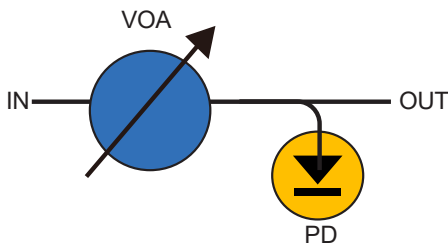

ORDERING INFORMATION

GP800 - [] - E - [] - [] - 9 - [] - [] - S - [] - N - []

Chassis Type

- 1U** 1U
- 2U** 2U
- 4U** 4U

**Please consult DiCon*

Device Type

- E** MEMS DPE

Configuration

- X/Y** # of Channels / Tap Ratio %

Alignment Type

- T** Transparent
- P** Opaque

Fiber Type

- 9** 9/125 μm SMF

**Other fiber options are available upon request*

Test Wavelength

- O** 1310 nm
- C** 1550 nm
- L** 1590 nm

**Use "/" to add multiple wavelengths (E.g., O/C or O/C/L)*

Attenuation Range

- 30** 30 dB Attenuation
- X** Specify X dB min.

**Other attenuation levels are available upon request*

WDL Type

- S** Superior Broad Band Flatness

Connector Type

- FC** FC/UPC
- FC/APC** FC/APC
- LC** LC/UPC
- LC/APC** LC/APC
- SC** SC/UPC
- SC/APC** SC/APC

**Other connector types are available upon request*

Connector Key Orientation

- N** None

Connector Location

- F** Front
- R** Rear

MEMS DYNAMIC POWER EQUALIZER

GP800 Model, Singlemode Fiber

OPTICAL SPECIFICATIONS^{1,2}

Operating Wavelength		1260 to 1680 nm	
Insertion Loss ³	1% Tap Ratio	0.8 dB max.	
	2%	0.9 dB max.	
	5%	1.1 dB max.	
	10%	1.3 dB max.	
Dynamic Power Range	1% Tap Ratio	-47 to 25 dBm	
	2%	-50 to 22 dBm	
	5%	-54 to 18 dBm	
	10%	-57 to 15 dBm	
Relative Power Accuracy ⁴		±0.2 dB max.	
Response Time ⁵		2 to 500 ms	
Closed Loop Bandwidth ⁶		45 Hz ⁷	
PDL ⁸	0 dB Att.	0.14 dB max.	
	< 10 dB Att.	0.2 dB max.	
	< 20 dB Att.	0.3 dB max.	
WDL	Superior Broad Band ¹⁰	< 10 dB Att. ⁸	0.5 dB max.
		< 20 dB Att. ⁹	0.7 dB max.
Back Reflection		-50 dB max.	
Tuning Resolution		0.01 dB	
Durability ¹¹		1 Billion Cycles min.	
Optical Power ¹¹		500 mW max.	
Fiber Type		Singlemode	

- All specifications are measured separately at room temperature for each Test Wavelength
- DiCon recommends the use of external detectors or a dynamic power equalizer module for applications requiring absolute attenuation accuracy
- Measured with 3-jumper method or equivalent (See TIA/EIA 526-7)
- For closed-loop operation when
 - output power > -27 dBm for 1% tap ratio
 - output power > -30 dBm for 2% tap ratio
 - output power > -34 dBm for 5% tap ratio
 - output power > -37 dBm for 10% tap ratio
- The averaging time for power measurements and the control loop interval for the built-in Variable Optical Attenuator (VOA)
- The frequency range where the system can suppress input power fluctuations by over 50%
- When input power > -30 dBm
- Adds 0.1 dB for dual-band operation
- Adds 0.3 dB for dual-band operation
- Maximum variation within the wavelength range of Test Wavelength ±20 nm
- Met by design, not measured

ELECTRICAL SPECIFICATIONS

Power Supply	100-240 VAC, 50/60 Hz
Connectors	RJ45 (Ethernet) DB9 (RS232) USB-C (Service)
Control Interface	Web GUI, SSH, RS232, REST API, Telnet


ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 50°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

MECHANICAL SPECIFICATIONS

Chassis Width	483 mm (19")
Chassis Depth	435 mm (17")
Chassis Height	1U : 44 mm (1.7")
	2U : 88 mm (3.5")
	4U : 177 mm (7.0")

Front View



Rear View

