



MEMS 192X192 OPTICAL MATRIX SWITCH MODULE

SX4 Model, Single Mode Fiber, Standard Grade

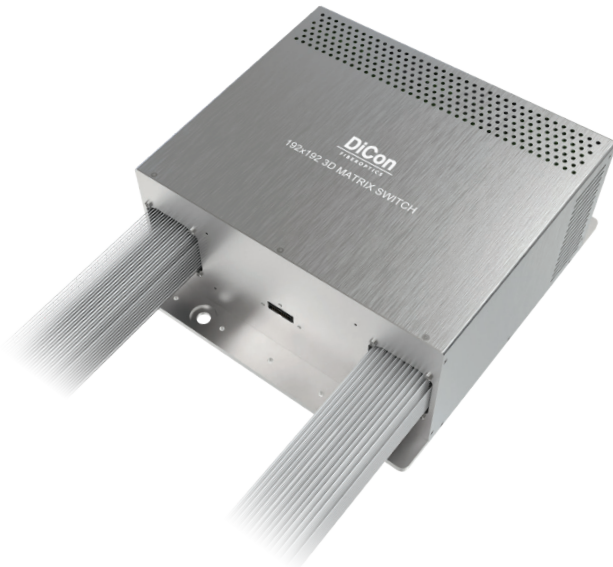

MEMS Optical Matrix Switch Module is built with DiCon's proprietary MEMS technology. Each module contains 2 sets of MEMS mirrors for making 1-to-1 connections between input and output ports. The MEMS mirrors are held in position using precisely calibrated voltages and require no feedback control. This unique quality enables the switch to maintain stable connections and allows the device to function when there is no light in the fiber. This innovative platform has an outstanding track record and delivers best-in-class optical performance

- Proven MEMS technology
- Lifetime > 10⁹ switch cycles
- No dithering or active alignment artifacts
- Switches and holds dark fiber connections
- Low insertion loss with excellent stability
- Compact and lightweight
- Asymmetric MxN available



About DiCon

- Headquartered in California since 1986
- US based in-house MEMS fab
- Over 3 million MEMS mirrors produced since 1999
- Manufactures TAA compliant products

ORDERING INFORMATION

SX4 - T - 9 - C - T - - N -

Grade

T Standard

Switch Configuration

192x192 192x192
MxN M≤192, N≤192

Fiber Type

9 9/125 μm SMF
**Other fiber options available upon request*

Selectable Wavelength Ranges

C 1530-1625 nm

Fiber Jacket

T 900 μm Tight Buffer
**Other fiber options available upon request*

Connector Type

N None
FC FC/UPC
FC/APC FC/APC
LC LC/UPC
LC/APC LC/APC
SC SC/UPC
SC/APC SC/APC
**Other connector types available upon request*

Connector Key Orientation

N None

Pigtail Length

1 1 Meter
X Specify X Meters
**Tolerance is +/- 0.05 m*

MEMS 192X192 OPTICAL MATRIX SWITCH MODULE

SX4 Model, Single Mode Fiber, Standard Grade

OPTICAL SPECIFICATIONS

Wavelength Range	1260 to 1675 nm
Insertion Loss ¹	< 1.2 dB
Loss Repeatability ²	+/- 0.03 dB
Connection Stability ³	+/- 0.03 dB
PDL, C+L Band (1530-1625 nm)	< 0.1 dB
WDL, C+L Band (1530-1625 nm)	< 0.3 dB
Crosstalk	< -60 dB
Back Reflection	< -50 dB
Switching Time, All Channels	< 25 ms
Switch Lifetime	> 1 Billion Cycles
Input Power Range	Dark to +27 dBm

1. Measured at optimized λ (e.g. 1550 nm), 25°C, excluding connectors (Each pair of connectors will add extra 0.2 dB loss.)

2. Over 100 cycles

3. 1 Hz sampling rate for 15 min

ELECTRICAL SPECIFICATIONS

Module Power Consumption	23 W max. Operating 36 W max. Start Up
Supply Voltage	12V DC
Module Interface	16-Pin Samtec
Module Control	USB, RS232, I ² C

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 50°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

MECHANICAL SPECIFICATIONS

Module Size	292 mm x 273 mm x 126 mm
Module Weight (with fibers)	8.65 kg

Dimensions in mm

