


MEMS 600X600 OPTICAL SWITCHING SYSTEM

OSS Model, Single Mode Fiber, Quantum Grade

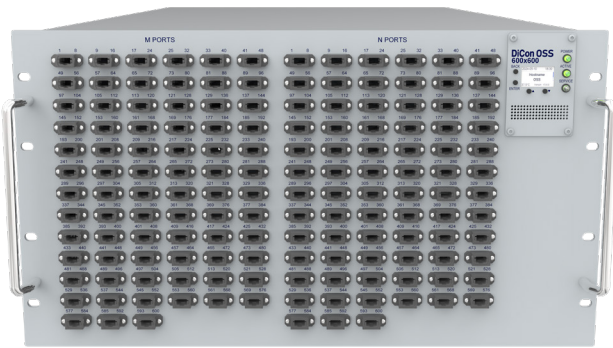

DiCon's **Optical Switching System (OSS)** is an all-optical non-blocking cross-connect switch. This rack-mount device is designed with DiCon's proprietary 3D MEMS mirror technology and delivers industry-leading optical performance. The unit works without any position sensor or feedback loop, and the optical signals can pass through the equipment without any observable dithering artifacts. The **OSS** can switch repeatedly with great accuracy and maintain long-term connectivity with superior stability even when there is no optical signal in the fiber.

The chassis is compact, taking minimal rack space. It is also lightweight and can be picked up easily for installation. The **OSS** comes with multiple control interfaces so authorized administrators can automate network management and set user permissions in a Software Defined Network (SDN). This product can be ordered in standard simplex or duplex configurations, and customized port arrangements are available upon request. Optical power monitors and attenuators can be added to each path as options.

Key Features

- Market Leading Performance with Recognized Reliability
- Low Loss with High Stability & No Dithering Artifacts
- Compact, Lightweight, Easy to Transport
- Switches Fast & Consumes Low Power
- Operates Bi-Directionally & Works with Dark Fibers
- Supports Software Defined Networks

Applications

- Optical Network Management
- Quantum Communications
- Data Center Interconnect
- AI (Artificial Intelligence) Networks
- LLM (Large Language Models) Machine Training
- Cyber Security & Monitoring
- Network Test Automation

ORDERING INFORMATION

OSS - Q□ - □ - 9 - □ - □□ - □ - □

Grade

Q Quantum

Configuration

S600x600 Simplex 600x600
SMxN Simplex (M, N≤600)
D600 Duplex 600 Ports
D# Duplex (#≤600)

Function

Simplex	S	Matrix Switch Only
	SA	VOA Only
	MS	M Side Power Monitor
	MSA	M Side Power Monitor & VOA
	SN	N Side Power Monitor
	SAN	N Side Power Monitor & VOA
Duplex	MSN	Both Sides Power Monitor
	MSAN	Both Sides Power Monitor & VOA
	D	Matrix Switch Only
	DA	VOA Only
	DP	Power Monitor (B Ports / Outputs)
	DAP	Power Monitor & VOA (B Ports / Outputs)

Fiber Type

9 9/125 μm SMF
**Other fiber options available upon request*

Test Wavelength

O 1310 nm
C 1550 nm
L 1590 nm
**Use "/" to add multiple wavelengths. E.g., O/C or O/C/L*

Chassis Type

5U 5U
6U 6U
8U 8U
**Please consult DiCon **See "Mechanical Specifications"*

Power

A1 AC 100-240V Single
D1 DC -48V Single
A2 AC 100-240V Redundant
D2 DC -48V Redundant

Bulkhead Connector Type

LC LC/UPC
LC/APC LC/APC
RLC LC/UPC on Removable Panel
RLC/APC LC/APC on Removable Panel
HLC High Density LC/UPC
HLC/APC High Density LC/APC
M8F MTP-8 Female APC
M8M MTP-8 Male APC
M12F MTP-12 Female APC
M12M MTP-12 Male APC
M24F MTP-24 Female APC
M24M MTP-24 Male APC
**Other connector types are available upon request*

Connector Location

F Front
R Rear



MEMS 600X600 OPTICAL SWITCHING SYSTEM

OSS Model, Single Mode Fiber, Quantum Grade

OPTICAL SPECIFICATIONS¹

Test Wavelength	1260 to 1675 nm
Insertion Loss ²	< 2.1 dB
Insertion Loss (with 1 OPM) ²	< 2.4 dB
Insertion Loss (with 2 OPM) ²	< 2.7 dB
Loss Repeatability ³	+/- 0.01 dB
Connection Stability ^{4,5}	+/- 0.01 dB
Connection Stability (Short Term) ⁶	+/- 0.005 dB
PDL ⁵	< 0.1 dB
PDL with OPM ⁵	< 0.3 dB
WDL ^{5,7}	< 0.3 dB
Crosstalk	< -70 dB
Data Latency ⁵	< 15 ns
Back Reflection	< -50 dB
Optical Transition Time ^{5,8}	< 25 ms
Switch Lifetime	> 1 Billion Cycles
Input Power Range	Dark to +27 dBm
OPM Dynamic Range	-50 to +22 dBm
OPM Relative Accuracy	+/-0.2 dB @ > -30 dBm +/-0.5 dB @ > -50 dBm
VOA Accuracy (Closed-Loop) ^{5,9,10}	+/-0.3 dB @ 20 dB Attn +/-0.5 dB @ 30 dB Attn
VOA Accuracy (Open-Loop) ^{9,11}	+/-1.5 dB @ 20 dB Attn +/-1.5 dB @ 30 dB Attn

1. Measured separately for each Test Wavelength at room temperature
2. Measured with 3-jumper method or equivalent. See TIA/EIA 526-7
3. Over 100 cycles
4. 1 Hz sampling rate for 15 min
5. Met by design, not measured
6. 10 KHz sampling rate for 10 Sec
7. Test Wavelength +/-20 nm
8. Optical transition time for all ports switching concurrently, not including command processing overhead
9. 98th percentile of optical connections; defined as the average +2 standard deviations
10. Requires N side Power Monitoring
11. Corresponds to accuracy using Constant Attenuation Mode. Both Constant Power Mode and Relative Attenuation Mode will have better accuracy due to Closed-Loop feedback

ELECTRICAL SPECIFICATIONS

Power Consumption*	< 110W Steady State < 120W at Startup
Power Supply Options	Redundant Power Supply, 90-264 VAC or -48 VDC
Network Interface Card	RJ45 Dual Redundant Gigabit Ethernet
SDN & Automation Interfaces	REST API, NETCONF, SNMPv3, TL1, Web GUI, RS232, gNMI

*Power is measured with a redundant AC power supply and both M and N side power monitoring. When using a redundant DC power supply, the total power consumption may increase by 5-10 W.



ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 50°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

MECHANICAL SPECIFICATIONS

Chassis Width	483 mm (19")
Chassis Depth*	762 mm (30") 889 mm (35") 1016 mm (40")
Chassis Height	5U (with MTP/MPO-12)*

*Please consult DiCon. Depends on connectors and options.

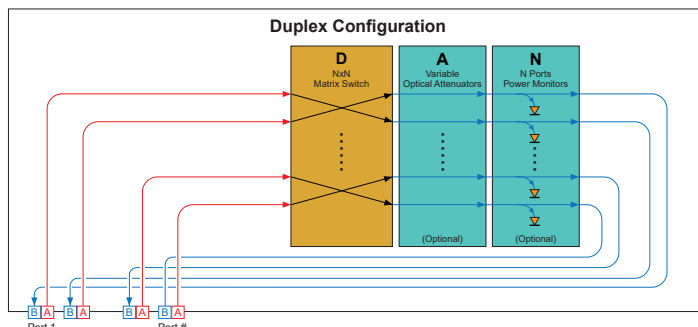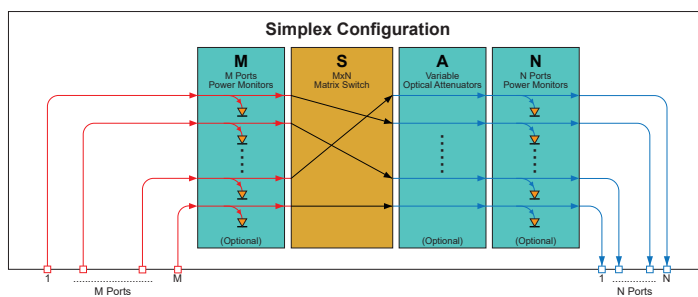

*Switch and light path operate bi-directionally but power monitors(optical) only measure uni-directionally unless special ordered.

