


MEMS 72X72 OPTICAL SWITCHING SYSTEM

GP800 Model, Polarization Maintaining Fiber

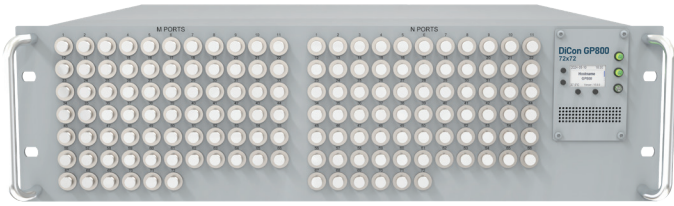

DiCon's **GP800 72x72 Optical Switching System** is an all-optical non-blocking cross-connect switch. This rack-mount device is designed with DiCon's proprietary 3D MEMS mirror technology and delivers industry-leading optical performance. The unit works without any position sensor or feedback loop, and the optical signals can pass through the equipment without any observable dithering artifacts. The **GP800 System** can switch repeatedly with great accuracy and maintain long-term connectivity with superior stability even when there is no optical signal in the fiber.

The **GP800 System** comes with multiple control interfaces for users to choose from and there are many options to customize the product, including adding other optical components, to meet unique requirements.

- High-density non-blocking Matrix Switches
- Interfaces - Web GUI, SSH, RS232, REST API, Telnet
- Advanced WebGUI for port partitions
- Low insertion loss - 0.8dB typical (excluding connector loss)
- Fast switching - concurrent switching < 25 ms
- Lifetime > 1 billion switch cycles
- No position sensor nor feedback-loop used
- Works even when there is no light in the fiber
- Excellent stability with no observable dithering artifacts
- Low power consumption
- Proven MEMS platform - commercial deployment since 2001
- Low MEMS drive voltage - simple and reliable electronics
- Intelligent hardware - field serviceable electronics

ORDERING INFORMATION

GP800 - [] - SX - [] - 9 - [] - [] - N - []

Chassis Type

- 2U** 2U
- 3U** 3U
- 4U** 4U
- 5U** 5U

**Please consult DiCon*

Product Type

- SX** MEMS Matrix Switch

Configuration

- T72x72** 72x72
- TMxN** MxN (M, N≤72)

Fiber Type

- PM13** Corning PM 1300 Fiber
- PM15** Corning PM 1550 Fiber

**Other fiber options available upon request*

Optimized Wavelength Range

- O** 1260-1360 nm
- E** 1360-1460 nm
- S** 1460-1530 nm
- C** 1530-1570 nm
- L** 1570-1625 nm
- U** 1625-1675 nm

**Multiple wavelength ranges can be supported.*

Use "/" to add multiple ranges.

For example: For 1260 - 1360 nm & 1530 - 1570nm use O/C, for 1260 to 1675 nm use O/E/S/C/L/U

Connector Type

- FC** FC/UPC
- FC/APC** FC/APC
- SC** SC/UPC
- SC/APC** SC/APC
- LC** LC/UPC
- LC/APC** LC/APC
- RLC** LC/UPC on Removable Panel
- RLC/APC** LC/APC on Removable Panel

**Other connector types available upon request*

Connector Key Orientation

- N** None
- S** Slow Axis
- F** Fast Axis

Connector Location

- F** Front
- R** Rear

MEMS 72X72 OPTICAL SWITCHING SYSTEM

GP800 Model, Polarization Maintaining Fiber

OPTICAL SPECIFICATIONS

| | |
|--|--------------------|
| Wavelength Range | 1260 to 1675 nm |
| Insertion Loss ¹ | < 1.2 dB |
| Loss Repeatability ² | +/- 0.03 dB |
| Connection Stability ³ | +/- 0.03 dB |
| Polarization Extinction Ratio (PER) ⁴ | > 18 dB |
| WDL (One Operating Band) | < 0.3 dB |
| Crosstalk | < -60 dB |
| Back Reflection | < -50 dB |
| Switching Time, All Channels | < 25 ms |
| Switch Lifetime | > 1 Billion Cycles |
| Input Power Range | Dark to +27 dBm |

1. Measured at optimized λ (e.g. 1550 nm), 25°C, excluding connectors (Each pair of connectors will add extra 0.2 dB loss.)
2. Over 100 cycles
3. 1 Hz sampling rate for 15 min
4. PER with connectors is 18 dB typical, 16 dB minimum

ELECTRICAL SPECIFICATIONS

| | |
|-------------------|---|
| Power Supply | 100-240 VAC, 50/60 Hz |
| Connectors | RJ45 (Ethernet) DB9 (RS232) USB-C (Service) |
| Control Interface | Web GUI, SSH, RS232, REST API, Telnet |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-----------------------|-----------------------|
| Operating Temperature | 0 to 50°C, < 85% RH |
| Storage Temperature | -40 to 70°C, < 40% RH |

MECHANICAL SPECIFICATIONS

| | |
|----------------|---|
| Chassis Width | 483 mm (19") |
| Chassis Depth | 435 mm (17") |
| Chassis Height | 3U/4U (Front/Back, FC) 3U/4U (Front/Back, SC) 2U/2U (Front/Back, LC) 2U/3U (Front/Back, RLC) |