



# GP850 MEMS VARIABLE OPTICAL ATTENUATOR

## Polarization Maintaining MEMS VOA Slot Card

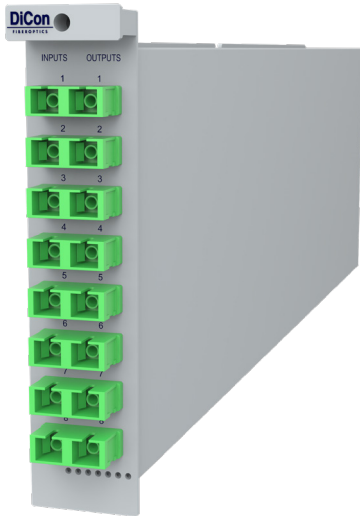

DiCon's **MEMS Variable Optical Attenuator (VOA) Slot Card** maintains optical power at a present level for up to sixteen fiber channels. Each slot card is designed for easy integration into DiCon's GP850 modular system. All slot cards are hot swappable and require no configuration, offering true plug-and-play functionality.

- Proven MEMS Durability and Reliability
- Compact Form Factor
- Excellent Output Accuracy
- Wide Attenuation Range
- Low Insertion Loss

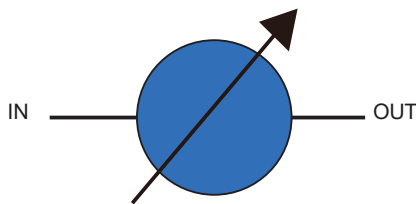

### ORDERING INFORMATION

**GP850 - SL - A -  -  -  -  -  -  - S -  -**

Product Type

**SL** Slot Card

Device Type

**A** MEMS VOA

Configuration

**X** # of Channels

Slot Width

**1S** 1-Slot Module

**2S** 2-Slot Module

*\*Custom multi-slot modules are available upon request*

Alignment Type

**T** Transparent

**P** Opaque

Fiber Type

**PM13<sup>1</sup>** Corning PM 1300 Fiber

**PM15<sup>2</sup>** Corning PM 1550 Fiber

*\*Other fiber options are available upon request*

*1.PER Specification covers O band*

*2.PER Specification covers C/L band*

Test Wavelength

**O** 1310 nm

**C** 1550 nm

**L** 1590 nm

*\*Use "/" to add multiple wavelengths (E.g., O/C or O/C/L)*

Attenuation Range

**30** 30 dB Attenuation

**X** Specify X dB min.

*\*Other attenuation level are available upon request*

WDL Type

**S** Superior Broad Band Flatness

Connector Type

**FC** FC/UPC

**FC/APC** FC/APC

**LC** LC/UPC

**LC/APC** LC/APC

**SC** SC/UPC

**SC/APC** SC/APC

*\*Other connector types are available upon request*

Connector Key Orientation

**S** Slow Axis

**F** Fast Axis

# GP850 MEMS VARIABLE OPTICAL ATTENUATOR

## Polarization Maintaining MEMS VOA Slot Card

### OPTICAL SPECIFICATIONS<sup>1</sup>

Operating Wavelength	1260 to 1680 nm	
Excess Loss <sup>2</sup>	0.6 dB max.	
WDL <sup>3</sup>	0 to 1 dB	0.3 dB max. <sup>4</sup>
	1 to 5 dB	0.5 dB max. <sup>4</sup>
	5 to 10 dB	0.6 dB max. <sup>4</sup>
	10 to 20 dB	1.0 dB max. <sup>4</sup>
PER <sup>5</sup>	16 dB min.	
Back Reflection	-50 dB max.	
Response Time <sup>6</sup>	2 ms max.	
Repeatability <sup>7</sup>	0.1 dB max.	
Durability <sup>8</sup>	1 Billion Cycles min.	
Optical Power <sup>8</sup>	500 mW max.	
Fiber Type	Panda PM	

1. All specifications are measured separately at room temperature for each Test Wavelength
2. Measured with 3-jumper method or equivalent (See TIA/EIA 526-7)
3. WDL is defined within Test Wavelength  $\pm 20$  nm
4. O-band adds 0.1 dB
5. PER is defined with connectors; PER without connectors is 18 dB minimum
6. Optical transition time; the actual processing delay to execute the attenuation command is longer
7. Repeatability is defined within 100 cycles
8. Met by design, not measured

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 50°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

### MECHANICAL SPECIFICATIONS

Dimensions in mm

