


# MEMS 64X64 OPTICAL CIRCUIT SWITCH

## OCS Model, Single Mode Fiber, Data Center Grade

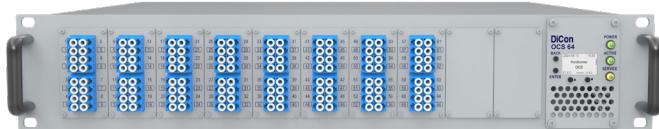

**DiCon OCS64** is a high-density, 64x64 fully non-blocking **Optical Circuit Switch (OCS)** engineered specifically to meet the cost expectation and rigorous performance demands of AI data center networks. Built on DiCon's proprietary **MEMS mirror technology**, this matrix switch leverages a platform that has been in high-volume commercial deployment for more than 20 years, offering an unrivaled track record of field-proven reliability.

DiCon's MEMS is precise and stable. Unlike many other switching solutions that require complex feedback loops, the OCS64 delivers industry-leading repeatability and reliability with standalone MEMS. It will operate seamlessly in dark fiber environments.

As AI clusters scale, the need for dynamic, redundant, and energy-efficient connectivity becomes an urgent priority. The OCS64 allows operators to reconfigure server clusters on the fly to meet evolving functional requirements and maintain 24/7 uptime through intelligent redundancy management.

By drastically reducing power consumption compared to electrical switches, the OCS64 provides a sustainable, cost effective, and high-performance solution for the rapidly progressing AI landscape.

### Advantages

- **Field-Proven Reliability:** Leveraging over two decades of volume deployment and real-world performance.
- **Sensor-less Stability:** Proprietary MEMS design eliminates the need for feedback loops; mirrors stay locked even in "dark fiber" conditions.
- **AI-Scale Efficiency:** Dramatic reduction in power consumption and heat dissipation compared to electrical (OEO) switches.
- **Future-Proof:** Protocol and bit-rate agnostic, supporting seamless transitions at any speed
- **Low Loss:** Meeting End-of-Life (EOL) insertion loss requirement for AI data center needs

### Applications

- Leaf-spine data center networks
- A.I. training clusters
- Intelligent data center network management

### ORDERING INFORMATION

OCS -  -  -  -  -

#### Configuration

**64** 64 Duplex Ports

#### Test Wavelength

<b>O</b>	1310 nm
<b>C</b>	1550 nm
<b>L</b>	1610 nm

#### Power

<b>A1</b>	AC 100-240V Single
<b>D1</b>	DC -48V Single
<b>A2</b>	AC 100-240V Redundant
<b>D2</b>	DC -48V Redundant

#### Bulkhead Connector Type

<b>LC</b>	LC/UPC
<b>LC/APC</b>	LC/APC
<b>RLC</b>	LC/UPC on Removable Panel
<b>RLC/APC</b>	LC/APC on Removable Panel
<b>M8F</b>	MTP-8 Female APC
<b>M8M</b>	MTP-8 Male APC
<b>M12F</b>	MTP-12 Female APC
<b>M12M</b>	MTP-12 Male APC

\*Other connector types are available upon request

# MEMS 64X64 OPTICAL CIRCUIT SWITCH

OCS Model, Single Mode Fiber, Data Center Grade

## OPTICAL SPECIFICATIONS<sup>1</sup>

Operating Wavelength	1310, 1510, or 1610 nm
Insertion Loss (E.O.L) <sup>2</sup>	2.0 dB Typ. (2.5 dB max.)
Crosstalk	< -60 dB
Data Latency	< 15 ns
Back Reflection	< -50 dB
Optical Transition Time <sup>3</sup>	< 25 ms
Switch Lifetime	> 1 Billion Cycles
Input Power Range	Dark to +27 dBm

1. Measured separately for each Test Wavelength at room temperature

2. Measured with 3-jumper method or equivalent. See TIA/EIA 526-7

3. Optical transition time for all ports switching concurrently, not including command processing overhead

## ELECTRICAL SPECIFICATIONS

Power Consumption	< 70 W Steady State < 100 W at Startup
Power Supply Options	Redundant Power Supply, 100-240 VAC or -48 VDC
Network Interface Card	RJ45 Dual Redundant Gigabit Ethernet
SDN & Automation Interfaces	REST API, NETCONF, SNMPv3, TL1, Web GUI, RS232, gNMI

## ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	10 to 40°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

## MECHANICAL SPECIFICATIONS

Chassis Width	435 mm (17")
Chassis Depth	559 mm (22")
Chassis Height	2U