

# SPACE QUALIFIED MEMS 1X4 OPTICAL SWITCH

## Cylindrical Package, Polarization Maintaining Fiber




DiCon's **Space Qualified MEMS 1x4 Optical Switch** allows channel selection between an input fiber and up to N output fibers. The switch is bi-directional and can also be used as an Nx1 selector switch. Built using DiCon's industry proven MEMS fiber optic switch technology, this optical switch offers highly reliable, durable, long-life operation in a compact, OEM package.

- Proven MEMS Durability and Reliability
- Compact Form Factor
- Fast Switching Time
- Direct Voltage Control
- Space Qualified

### Applications

- Optical Communications
- Fiber Sensing
- Analog & Digital Signal Transmission
- Video Distribution



## ORDERING INFORMATION

MSQ - □ - □ - □ - □ - □ - □ - □ - □ - □

### Switch Configuration

**1xN** 1xN (N≤4)

### Fiber Type

**PM13** Corning PM1310 Fiber

**PM15** Corning PM1550 Fiber

*\*Other fiber options are available upon request*

### Test Wavelength

**O** 1310 nm

**C** 1550 nm

**L** 1590 nm

*\*Use "/" to add multiple wavelengths  
(E.g., O/C or O/C/L)*

### Fiber Jacket

**9L** 900 μm Loose Tube Fiber

**2BF** 250 μm Bare Fiber

*\*Other fiber options are available upon request*

### Connector Type

**N** None

**FC** FC/UPC

**FC/APC** FC/APC

*\*Other connector type are available upon request*

### Connector Key Orientation

**N** None

**S** Slow axis

**F** Fast axis

### Pigtail Length

**1** 1 Meter

**X** Specify X Meters

*\*Tolerance is +/- 0.1 m*

### Pin Bending

**S** Straight Pins

**B** Bent Pins

# SPACE QUALIFIED MEMS 1X4 OPTICAL SWITCH

## Cylindrical Package, Polarization Maintaining Fiber


### OPTICAL SPECIFICATIONS<sup>1</sup>

Insertion Loss <sup>2,3,4</sup>	1.0 dB max.
Crosstalk <sup>5</sup>	-50 dB max.
Back Reflection	-50 dB max.
TDL	0.30 dB max.
WDL <sup>6</sup>	0.30 dB max.
PER <sup>7</sup>	18 dB min.
Repeatability <sup>8</sup>	0.02 dB
Optical Power	500 mW max.
Durability	10 <sup>9</sup> cycles min.
Switching Time <sup>9</sup>	10 ms max.

1. Measured separately for each Test Wavelength at room temperature
2. Measured with 3-jumper method or equivalent. See TIA/EIA 526-7.
3. IL is for standard opaque model.
4. IL is for single-band. Dual-band adds 0.1 dB.
5. Power off isolation is same as crosstalk.
6. WDL is measured in a +/- 20 nm range at 23°C.
7. PER with connectors is 15 dB min.
8. Repeatability is defined after 100 cycles.
9. When using optimized voltage ramp.

### MECHANICAL SPECIFICATIONS

Dimensions in mm

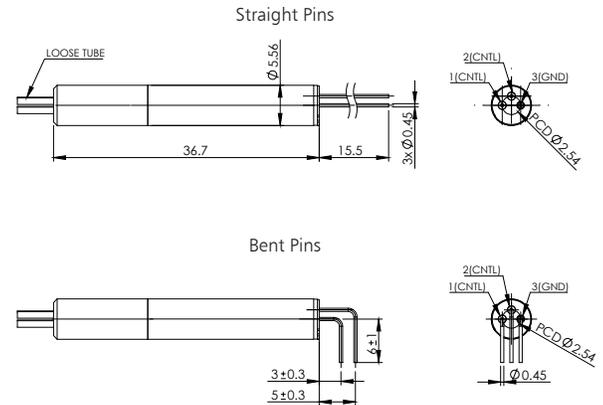

### ELECTRICAL SPECIFICATIONS

Latching Type	non-latching
Control Type	Direct Voltage <sup>1</sup>
Vcc Voltage	0-30 VDC
Power Consumption	120 $\mu$ W max.
Vcc Damage Threshold	40 VDC

1. Tolerance is +/- 10 mV to meet optical specifications.

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-5 to 70°C
Storage Temperature	-40 to 85°C

