

SPACE QUALIFIED MEMS 2X2 ADD/DROP OPTICAL SWITCH

Cylindrical Package, Singlemode Fiber




DiCon's **Space Qualified MEMS 2x2 Add/Drop Optical Switch** are two position devices that are commonly used in Optical Add/Drop Multiplexers. In the Bypass state, the Input and Output ports are connected to each other. In the Inserted state, the Input and Drop ports are connected to each other, while at the same time the Add and Output ports are connected to each other.

- Proven MEMS Durability and Reliability
- Compact Form Factor
- Fast Switching Time
- Direct Voltage Control
- Space Qualified

Applications

- Optical Communications
- Fiber Sensing
- Analog & Digital Signal Transmission
- Video Distribution

MEMS 2x2 Add/Drop OPTICAL SWITCH

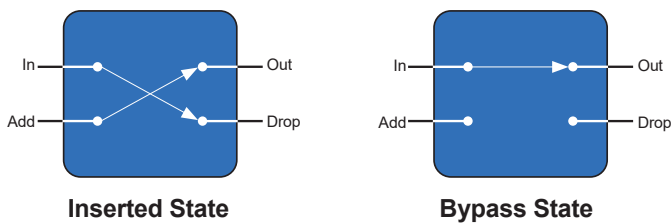

ORDERING INFORMATION

MSQ - 2x2/AD - 9 - □ - □ - □ - N - □ - □

Switch Configuration

2x2/AD 2x2 Add/Drop

Fiber Type

9 Corning SMF-28

**Other fiber options are available upon request*

Test Wavelength

13 1290 - 1330 nm

15 1530 - 1570 nm

16 1570 - 1610 nm

13/15 1290 - 1330 & 1530 - 1570 nm

15/16 1530 - 1570 & 1570 - 1610 nm

Fiber Jacket

9L 900 μm Loose Tube Fiber

2BF 250 μm Bare Fiber

**Other fiber options are available upon request*

Connector Type

N None

FC FC/UPC

FC/APC FC/APC

**Other connector type are available upon request*

Connector Key Orientation

N None

Pigtail Length

1 1 Meter

X Specify X Meters

**Tolerance is +/- 0.1 m*

Pin Bending

S Straight Pins

B Bent Pins



SPACE QUALIFIED MEMS 2X2 ADD/DROP OPTICAL SWITCH

Cylindrical Package, Singlemode Fiber


OPTICAL SPECIFICATIONS¹

Insertion Loss ^{2,3,4}	1.0 dB max.
Crosstalk ⁵	-50 dB max.
Back Reflection	-50 dB max.
TDL	0.30 dB max.
WDL ⁶	0.20 dB max.
PDL	0.10 dB max.
Repeatability ⁷	0.02 dB
Optical Power	500 mW max.
Durability	10 ⁹ cycles min.
Optical Transition Time ⁸	20 ms max.

1. Measured separately for each Test Wavelength at room temperature
2. Measured with 3-jumper method or equivalent. See TIA/EIA 526-7.
3. IL is for standard opaque model.
4. IL is for single-band. Dual-band adds 0.2 dB.
5. Power off isolation is same as crosstalk.
6. WDL is measured in a +/- 20 nm range at 23°C.
7. Repeatability is defined after 100 cycles.
8. When using optimized voltage ramp.

MECHANICAL SPECIFICATIONS

Dimensions in mm

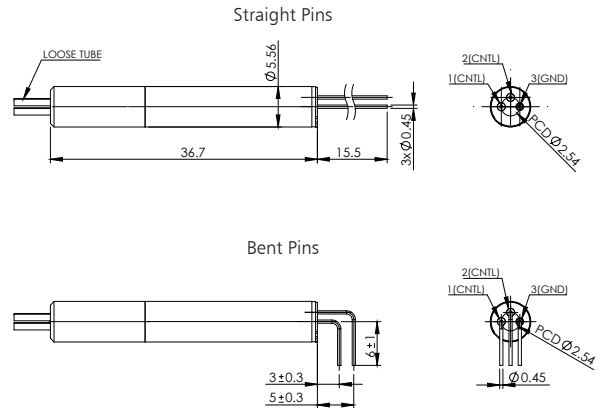

ELECTRICAL SPECIFICATIONS

Latching Type	non-latching
Control Type	Direct Voltage ¹
Vcc Voltage	0-30 VDC
Power Consumption	120 μW max.
Vcc Damage Threshold	40 VDC

1. Tolerance is +/- 10 mV to meet optical specifications.

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-5 to 70°C
Storage Temperature	-40 to 85°C

